



SE-1200 Series

12-channel Electrocardiograph

Technical Specifications:

	SE-1200 Twelve-Channel ECG	SE-1200 Express Twelve-Channel ECG
Input Circuit	Defibrillator protection built-in	
Lead	Standard 12 leads	
Acquisition Mode	simultaneous 12 lead acquisition (10-24 seconds adjustable)	
A/D Converter	24 bits	
Input Voltage Range	± 5mVpp	
Time Constant	> 3.2s	
Frequency Response	0.05Hz ~ 150Hz	
Calibration Voltage	1mV ± 2%	
Sensitivity	2.5, 5, 10, 20, 10/5, AGC (mm/mV)	
Input Impedance	> 50MΩ (10Hz)	
Input Circuit Current	< 10nA	
Noise Level	< 12.5 μVp-p	
Anti Baseline Drift	Automatic	
Patient Leakage Current	< 10 μA (220V-240V)	
Patient Auxiliary Current	< 0.1 μA (DC)	
Filter	EMG filter 25Hz/35Hz/45Hz/OFF DFT filter 0.05/0.15/0.25/0.5/0.32/0.67 Hz Lowpass filter 150Hz/100Hz/75Hz filter 50 Hz/60Hz	
CMRR	> 115dB	
Recording Mode	Auto/Manual/Rhythm/R-R	
Rhythm Lead	Single lead or three leads selectable	
Power Supply	AC:100V-240V, 50/60Hz	
Battery	Built-in rechargeable Li-ion battery; voltage=14.8V, for about 300 copies ECG printing	Built-in rechargeable Li-ion battery; voltage=14.8V, for about 350 copies ECG printing
Record	Thermal Printer	
Record Paper	Roll and Z-fold	
Paper Width	216mm, 210mm width	
Record Speed	5mm/s, 6.25mm/s, 10mm/s, 12.5mm/s, 25mm/s, 50mm/s (± 3%)	
Dimension	420mm x 330mm x 120mm	
Display	5.7" 320 × 240 dots monochrome LCD	8.4" 800 × 600 dots color TFT
External Input/Output	Input: > 100KΩ; Sensitivity 10mm/V ± 5% Output: < 100Ω; Sensitivity 1V/mV ± 5%	
Communication Ports	Ethernet, RS232, USB	

EDAN

SE-1200 Series

12-channel Electrocardiograph



EDAN Edan Instruments, Inc.
 3F-B, Nanshan Medical Equipments Park, Nanhai Rd 1019#, Shekou, Nanshan, Shenzhen, 518067 P.R. China
 Tel: 86-755-2689 8326 Fax: 86-755-2689 8330 www.edan.com.cn Email: info@edan.com.cn




All rights are reserved.
 Features and specifications are subject to change without notice



ENG-ECG-SE1200 -V1.8 -20101109

- Compact, lightweight design with carrying handle
- 5.7 inch LCD screen
- Digital filters for baseline, AC and EMG interference resistance
- Standby mode for energy saving
- Built-in Ethernet and RS-232 interfaces for PC connection
- USB port for data transmission and external jet-printer connection
- Internal 100 ECGs storage
- Barcode Scanner Support
- Extended printing on Arrhythmia
- Grid printing on A4 size fax paper
- PDF, SCP and FDA-XML data export capabilities
- Wireless transmitting option

SE-1200

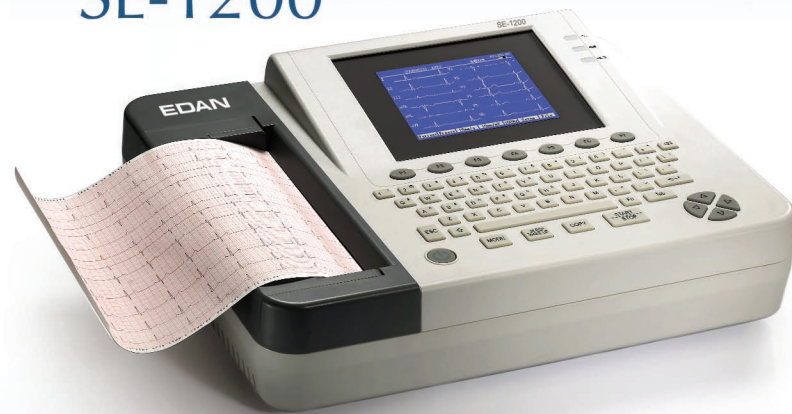



SE-1200 Series Twelve-channel ECG

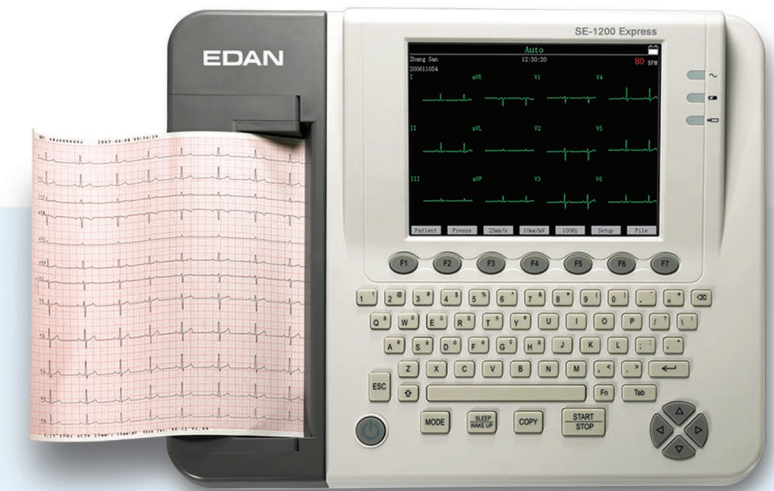

Preview and print: We make it possible to preview report for both real-time printing and file storage





Useful tools: Average template waveform with accurate interpretation tested with CSE DATABASE (IEC 60601-2-51), which supplies measurement, diagnosis and Minnesota code




Waveform Edit: Doctor can edit the printing style, printing speed, sensitivity, and used filter to get better waveforms instead of repeating patient examination

Replay and record: Freeze and review waveform timely to grasp every arrhythmia




File storage: Internal storage including waveforms, measurement and diagnosis which could also be enlarged by flash disk




SE-1200 Express

- 8" High-resolution color screen with touch function
- Alphanumeric keyboard
- Internal 200 ECGs storage
- Waveforms and analysis result preview
- Waveform freezing and replay to capture arrhythmia
- Heart rate variability (HRV) analysis
- Trolley and cable bracket support
- Barcode Scanner Support
- Extended printing on Arrhythmia
- Grid printing on A4 size fax paper
- PDF, SCP and FDA-XML data export capabilities
- Wireless transmitting option


Smart ECG Viewer

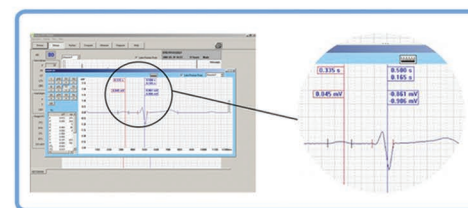


Manual Measurement



Interpretation

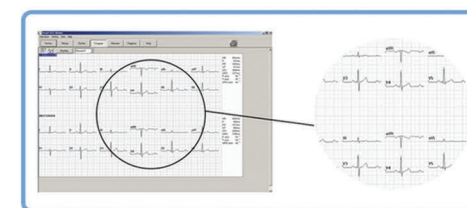

Compare Viewing for Different Examination

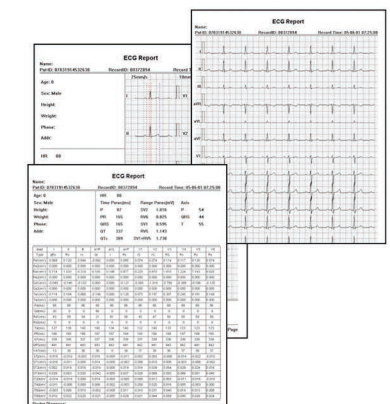

Multiple report Formats